

E13863



ROG STRIX XG32WCS

USER GUIDE

ASUS

Copyright © 2024 ASUSTeK COMPUTER INC. All Rights Reserved.

No part of this manual, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means, except documentation kept by the purchaser for backup purposes, without the express written permission of ASUSTeK COMPUTER INC. ("ASUS").

Product warranty or service will not be extended if: (1) the product is repaired, modified or altered, unless such repair, modification or alteration is authorized in writing by ASUS; or (2) the serial number of the product is defaced or missing.

ASUS PROVIDES THIS MANUAL "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL ASUS, ITS DIRECTORS, OFFICERS, EMPLOYEES OR AGENTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING DAMAGES FOR LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OR DATA, INTERRUPTION OF BUSINESS AND THE LIKE), EVEN IF ASUS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES ARISING FROM ANY DEFECT OR ERROR IN THIS MANUAL OR PRODUCT.

SPECIFICATIONS AND INFORMATION CONTAINED IN THIS MANUAL ARE FURNISHED FOR INFORMATIONAL USE ONLY, AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE, AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY ASUS. ASUS ASSUMES NO RESPONSIBILITY OR LIABILITY FOR ANY ERRORS OR INACCURACIES THAT MAY APPEAR IN THIS MANUAL, INCLUDING THE PRODUCTS AND SOFTWARE DESCRIBED IN IT.

Products and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are used only for identification or explanation and to the owners' benefit, without intent to infringe.

Contents

Notices.....	iv
Safety Information	v
Screen Cleaning Instructions (Including Sensors)	vii
Takeback Services.....	x

Chapter 1: Product Introduction

1.1	Welcome!	1-1
1.2	Package Contents	1-1
1.3	Monitor Introduction	1-2
1.3.1	Front View	1-2
1.3.2	Back View	1-4
1.3.3	GamePlus Function	1-5
1.3.4	GameVisual Function.....	1-7

Chapter 2: Setup

2.1	Monitor Introduction	2-1
2.2	Attaching the Stand	2-2
2.3	Cable Management	2-3
2.4	Detaching the Stand (for VESA wall mount).....	2-3
2.5	Connecting the Cables	2-4
2.6	Turning On the Monitor	2-5
2.7	Adjusting the Monitor	2-6

Chapter 3: General Instructions

3.1	OSD (On-Screen Display) Menu.....	3-1
3.1.1	How to Reconfigure	3-1
3.1.2	OSD Function Introduction.....	3-2
3.2	Specifications.....	3-11
3.3	Outline Dimensions	3-13
3.4	Troubleshooting (FAQ).....	3-14
3.5	Enabled & Unavailable OSD Feature Functions	3-15
3.6	Supported Timing List	3-16

Notices

Federal Communications Commission Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with manufacturer's instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



The use of shielded cables for connection of the monitor to the graphics card is required to assure compliance with FCC regulations. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Canadian Department of Communications Statement

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

This class B digital apparatus complies with Canadian ICES-003.

This Class B digital apparatus meets all requirements of the Canadian Interference - Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouiller du Canada.

EAC

Safety Information

- Before setting up the monitor, carefully read all the documentation that came with the package.
- To prevent fire or shock hazard, never expose the monitor to rain or moisture.
- Never try to open the monitor cabinet. The dangerous high voltages inside the monitor may result in serious physical injury.
- If the power supply is broken, do not try to fix it by yourself. Contact a qualified service technician or your retailer.
- Before using the product, make sure all cables are correctly connected and the power cables are not damaged. If you detect any damage, contact your dealer immediately.
- Slots and openings on the back or top of the cabinet are provided for ventilation. Do not block these slots. Never place this product near or over a radiator or heat source unless proper ventilation is provided.
- The monitor should be operated only from the type of power source indicated on the label. If you are not sure of the type of power supply to your home, consult your dealer or local power company.
- Use the appropriate power plug which complies with your local power standard.
- Do not overload power strips and extension cords. Overloading can result in fire or electric shock.
- Avoid dust, humidity, and temperature extremes. Do not place the monitor in any area where it may become wet. Place the monitor on a stable surface.
- Unplug the unit during a lightning storm or if it will not be used for a long period of time. This will protect the monitor from damage due to power surges.
- Never push objects or spill liquid of any kind into the slots on the monitor cabinet.
- To ensure satisfactory operation, use the monitor only with UL listed computers which have appropriate configured receptacles marked between 100-240V AC.
- If you encounter technical problems with the monitor, contact a qualified service technician or your retailer.
- Adjustment of the volume control as well as the equalizer to other settings than the center position may increase the ear-/headphones output voltage and therefore the sound pressure level.



Declaration of Conformity

This device complies with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (2014/30/EU), Low-voltage Directive (2014/35/EU), REGULATION (EU) 2024/1781 and RoHS directive (2011/65/EU). This product has been tested and found to comply with the harmonized standards for Information Technology Equipment, these harmonized standards published under Directives of Official Journal of the European Union.

WEEE Symbol Statement

The Waste Electrical and Electronic Equipment (WEEE) Directive (Directive 2012/19/EU) is a European Union law that aims to reduce the environmental impact of electrical and electronic equipment. It mandates producers to take responsibility for the end-of-life management of their products, promoting collection, treatment, and recycling to minimize waste and encourage resource recovery.

Do not throw your Electronic and electrical equipment in municipal waste.

The symbol of the crossed-out wheeled bin on the product or packaging indicates that this product (including any batteries it contains), must not be disposed of with your household waste.

To prevent potential harm to the environment and human health, a collection framework should be used to return, recycle, and recover waste electrical and electronic equipment (WEEE), and this product has been designed to enable the reuse of parts and facilitate the recycling of certain materials.

Improper disposal may involve risks due to the presence of hazardous substances within electrical and electronic equipment, such as lead and BFR and other harmful components.

Check your local recycling services for electronic products.
(<https://esg.asus.com/en/circular-economy/resource-regeneration/global-take-back-service>)

New Mexico PFAS Labeling



AEEE yönetmeliğine uygundur

Screen Cleaning Instructions (Including Sensors)

When cleaning displays (including sensors), special care and proper methods are required to avoid damaging the screen. Please follow the recommendations below for safe and effective cleaning.

- **Required Materials**

1. **Microfiber cloth:** Use a soft microfiber cloth that will not scratch the screen surface.
2. **Purified water:** Avoid water containing minerals or impurities.
3. **Spray bottle:** Use it to lightly spray purified water onto the microfiber cloth — never directly onto the screen.

- **Cleaning Procedure**

1. **Power Off the Device:** Before lifting, repositioning, or cleaning the display, disconnect all cables and unplug the power cord. When moving the monitor, always hold it by the edges of the display. Never lift or carry the monitor by the stand or power cable.
2. **Dry Cleaning:** Turn off the monitor and unplug the power cord. Use a clean, dry microfiber cloth to gently wipe the screen surface and remove dust or loose particles.
3. **Damp Cleaning:** Lightly spray a small amount of purified water onto the microfiber cloth. Do not spray liquid directly onto the screen or sensor. Gently wipe the screen surface without applying excessive pressure.
4. **Dry the Screen:** Use another clean microfiber cloth to gently dry the screen surface and ensure no liquid residue remains. If necessary, repeat the cleaning process 2–3 times.

- **Important Precautions**

1. Do not use alcohol-based or ammonia-based cleaners. These chemicals may damage the screen coating.
2. Do not spray liquid directly onto the screen. Liquid may seep into the edges of the panel and damage internal components.
3. Do not apply excessive force. Excessive pressure may damage the panel or leave scratches.
4. Never use tissues, paper towels, kitchen towels, or regular cloth towels. These materials contain relatively coarse fibers that can easily leave fine scratches on the screen surface.

By following the instructions above, you can safely and effectively clean display panels (including sensors) while maintaining image clarity and preventing damage.

Important: Screen Protective Film Removal & Screen Maintenance Instructions

Before using your display, please carefully read the following instructions regarding the screen surface films and coatings. Improper handling may result in permanent damage that is not covered under warranty.

1. Must Be Removed: Shipping Protective Film (OLED only)

To protect the panel from scratches during transportation, the screen surface is covered with a transparent protective shipping film.

- **Removal Instructions:** Locate the colored pull tab, typically found at the lower-left or lower-right corner of the screen. Slowly and evenly peel off the entire protective film following the direction indicated by the tab.

- **Reasons for Removal**

1. **Heat Dissipation:** OLED pixels generate heat during operation. If the protective film is not removed, heat may accumulate on the panel surface, potentially causing overheating, accelerated panel aging, and significantly increasing the risk of image retention or burn-in.

2. **Sensor Performance:** The protective film may obstruct the ambient light sensor located beneath the display surface, resulting in abnormal automatic brightness adjustment behavior.

3. **Image Quality:** The shipping film is not made from optical-grade material. Removing it is necessary to experience the OLED panel's intended contrast ratio and color accuracy.

2. Do NOT Remove: Polarizer Layer & Functional Coatings

After removing the transparent shipping protective film with the pull tab, the remaining dark layer tightly bonded to the screen surface is part of the panel structure itself.

- **WARNING:** Do not attempt to peel, scrape, or remove the dark film layer using fingernails, blades, or any tools. This layer is the panel's polarizer or anti-reflective coating (AR/AG coating), which is a critical component of the display system.
- **Consequences:** Removing or damaging this layer may cause the display to malfunction, including a completely white screen or abnormal color distortion. Such damage is considered physical misuse and will immediately void the product warranty.

The following symptoms are normal with the monitor:

- The screen may flicker during the initial use due to the nature of the fluorescent light. Turn off the Power Switch and turn it on again to make sure that the flicker disappears.
- You may find slightly uneven brightness on the screen depending on the desktop pattern you use.
- When the same image is displayed for hours, an afterimage of the previous screen may remain after switching the image. The screen will recover slowly or you can turn off the Power Switch for hours.
- When the screen becomes black or flashes, or cannot work anymore, contact your dealer or service center to fix it. Do not repair the screen by yourself!

Conventions used in this guide



WARNING: Information to prevent injury to yourself when trying to complete a task.



CAUTION: Information to prevent damage to the components when trying to complete a task.



IMPORTANT: Information that you **MUST** follow to complete a task.



NOTE: Tips and additional information to aid in completing a task.

Where to find more information

Refer to the following sources for additional information and for product and software updates.

1. **ASUS websites**

The ASUS websites worldwide provide updated information on ASUS hardware and software products. Refer to **<http://www.asus.com>**

2. **Optional documentation**

Your product package may include optional documentation that may have been added by your dealer. These documents are not part of the standard package.

3. **About Flicker**

https://www.asus.com/Microsite/display/eye_care_technology/

Takeback Services

ASUS recycling and takeback programs come from our commitment to the highest standards for protecting our environment. We believe in providing solutions for our customers to be able to responsibly recycle our products, batteries and other components as well as the packaging materials.

Please go to <https://esg.asus.com/en/circular-economy/resource-regeneration/global-take-back-service> for detail recycling information in different region.

HDMI TM The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.
HIGH-DEFINITION MULTIMEDIA INTERFACE

1.1 Welcome!

Thank you for purchasing the ASUS® LCD Gaming monitor!

The latest widescreen LCD monitor from ASUS provides a crisper, broader, and brighter display, plus a host of features that enhance your viewing experience.

With these features, you can enjoy the convenience and delightful visual experience that the monitor brings to you!

1.2 Package Contents

Check your package for the following items:


- ✓ LCD Monitor
- ✓ Quick Start Guide
- ✓ Warranty Card
- ✓ 1x Power Cord
- ✓ 1x DisplayPort Cable
- ✓ ROG Pouch
- ✓ ROG Sticker



If any of the above items is damaged or missing, contact your retailer immediately.

1.3 Monitor Introduction

1.3.1 Front View

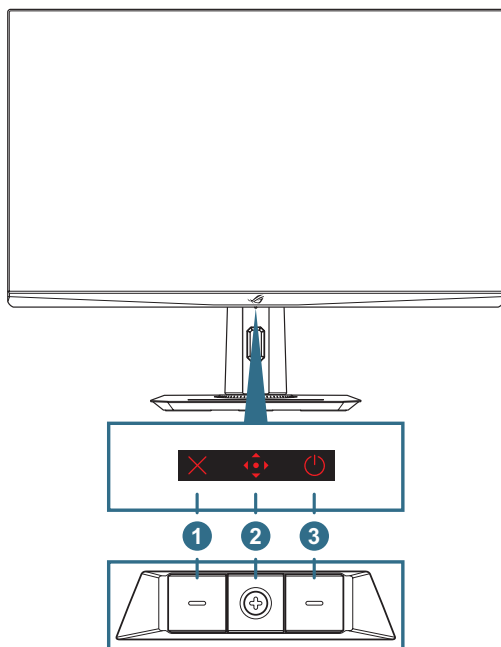

1. **✖ Close button:**

- When the OSD menu is OFF, press to activate the **Input Select** hotkey.
- When the OSD menu is ON, press to exit the OSD menu.

2. **⬆⬇⬆ Control buttons:**

- a. When the OSD menu is OFF:
- Press the **⬆⬇⬆** button to activate the OSD menu.
 - Move the **⬆⬇⬆** button right to activate the **GamePlus** hotkey.
 - Move the **⬆⬇⬆** button up to activate the **GameVisual** hotkey.
 - Move the **⬆⬇⬆** button down to activate the **Volume** hotkey.




To change the preset hotkey function, go to the **MyFavorite > Shortcut** menu.

b. When the OSD menu is ON:

- Press the  button to enact the selected OSD menu item.
- Move the  button right to enter the submenu.
- Move the  button left to return to the previous menu or exit the menu.
- Move the  button up to move your selection up or increase value.
- Move the  button down to move your selection down or decrease value.

3. **Power button:** Turn the monitor on/off.

1.3.2 Back View

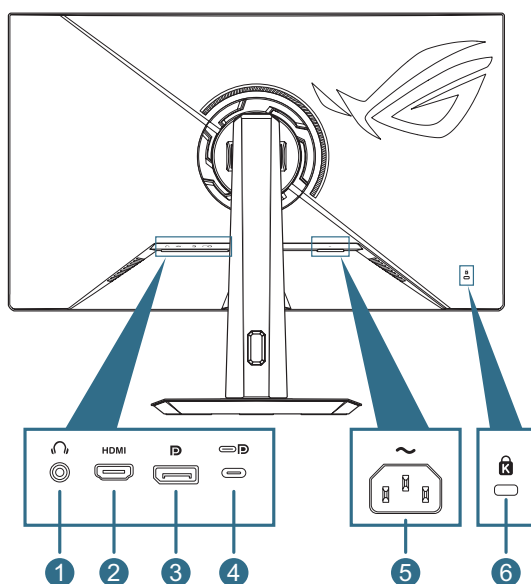

1. **Earphone jack:** This port is connection with an Earphone (Impedance: 32Ω at 1 kHz)
2. **HDMI port:** This port is for connection with an HDMI V2.0 compatible device.
3. **DisplayPort:** This port is for connection with a DisplayPort compatible device.
4. **USB type-C Port:** This port is for connection with a USB type-C cable. The connection supports video signal (DP Alt mode), power delivery, and data transmission.



- The port offers max. 5V/3A. USB Type-C port supports power delivery and data. USB Type-C port supports power delivery and data transmission. Connecting the USB type-C to type-A cable only enables the USB type-A ports (downstream) on the monitor.
- Disclaimer: Connected USB Type-C Devices need to support DP Alt mode.

5. **AC-IN port:** This port connects the power cord.
6. **Kensington lock slot**


1.3.3 GamePlus Function

The GamePlus function provides a toolkit and creates a better gaming environment for users when playing different types of games. The crosshair overlay with several crosshair options letting you choose the one that best suits the game you're playing. There are also on screen timer and stopwatch you can position on the left of the display so you can keep track of the gaming time; while the FPS (frames per second) counter lets you know how smooth the game is running. You can select the magnification ratio and the type of alignment in sequence.


To activate GamePlus:

1. Move the  button right.
2. Move the  button up/down to select among different functions.
3. Press the  button or move the  button right to confirm the function you choose, and move the  button up/down to navigate through the settings. Move the  button left to go back, off, or exit.
4. Highlight the desired setting and press the  button to activate it. Press the  button to inactivate it.


GamePlus Main Menu

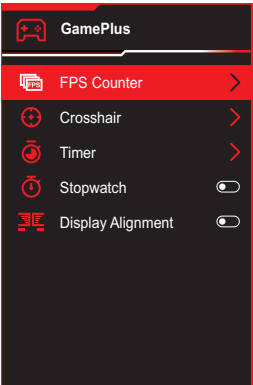


GamePlus — FPS Counter

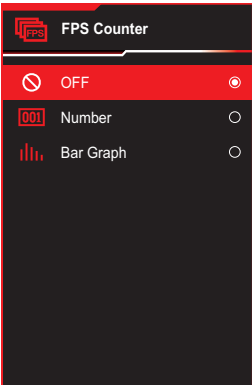

GamePlus — Crosshair
(the Dynamic Crosshair will change color depending on the background color)

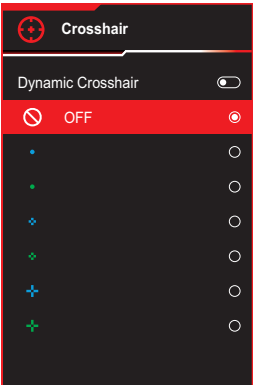

GamePlus — Timer

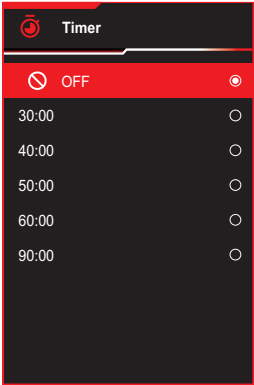

1.3.4 GameVisual Function

The GameVisual function helps you select among different picture modes in a convenient way.


To activate GameVisual:

1. Press the GameVisual shortcut button.
2. Move the  button up/down to select the desired setting.
 - **Scenery Mode:** This is the best choice for scenery photo displaying with GameVisual™ Video intelligence Technology.
 - **Racing Mode:** This is the best choice for racing game playing with GameVisual™ Video intelligence Technology.
 - **Cinema Mode:** This is the best choice for movie watching with GameVisual™ Video intelligence Technology.
 - **RTS/RPG Mode:** This is the best choice for Real-Time Strategy (RTS)/ Role-Playing Game (RPG) playing with GameVisual™ Video intelligence Technology.
 - **FPS Mode:** This is the best choice for First Person Shooter game playing with GameVisual™ Video intelligence Technology.
 - **sRGB Mode:** This is the best choice for viewing photos and graphics from PCs.
 - **MOBA Mode:** This is the best choice for Multiplayer Online Battle Arena (MOBA) games playing with GameVisual™ Video intelligence Technology.
 - **Night Vision:** This is the best choice for dark scenery playing GameVisual™ Video intelligence Technology.
 - **User Mode:** More items are adjustable in the Color menu.
3. Press the  button to activate the setting.



-
- In the sRGB mode, the following function(s) are not user-configurable: Shadow Boost, Contrast, ASCR, Blue Light Filter, Display Color Space, Color Temp., Saturation, Six-axis Saturation, Gamma.
 - In the MOBA Mode, the following function(s) are not user-configurable: VividPixel, Saturation, Six-axis Saturation.
 - In the Night Vision mode, the following function(s) are not user-configurable: Saturation, Six-axis Saturation.
-

2.1 Monitor Introduction

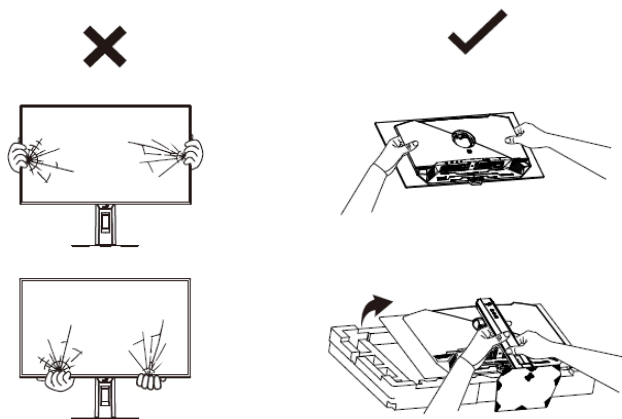


Monitor Handling / Disassembly SOP

1. Hold the monitor by both sides of the rear cover when carrying it.
2. Do not press on the front surface of the panel to avoid cracks, bright spots, or display abnormalities.
3. Before disassembly, place the monitor flat on the table.
4. Avoid applying force to a single point during disassembly, and ensure the monitor is placed securely.
5. Handle the monitor carefully during the entire process to avoid impact, bending, or scratches.


2.2 Attaching the Stand

1. Align and install the base to the stand. Then fix the base to the stand by fastening the bundled screw.
2. Align and install the stand to its compartment on the rear of the monitor.
3. Carefully remove the monitor from the EPS packaging.
4. Place the monitor on a stable surface in the upright position.

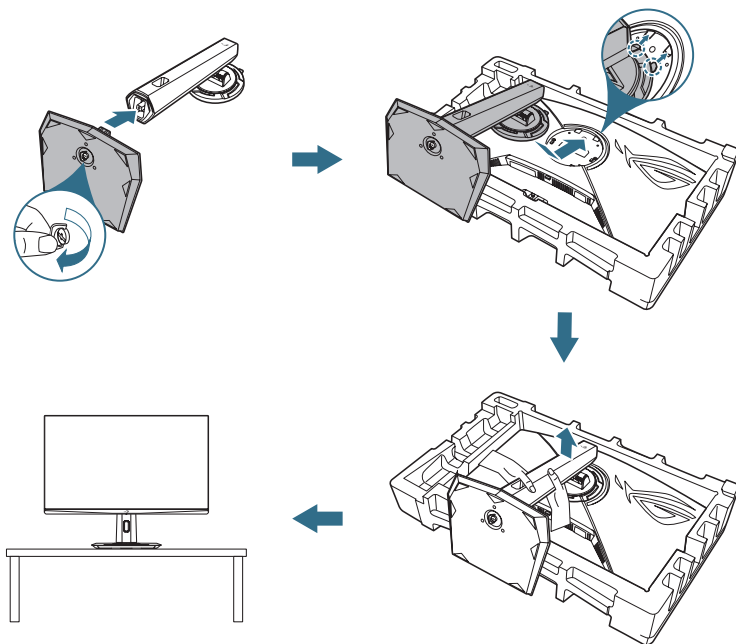

2.3 Cable Management


You can organize the cables by arranging them as shown in the illustration below:

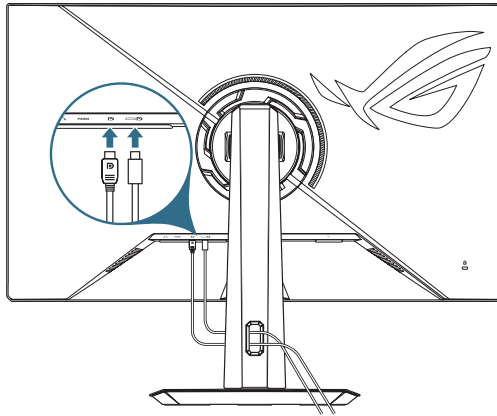

2.4 Detaching the Stand (for VESA wall mount)

The detachable stand of this monitor is specially designed for VESA wall mount.


1. Press the release button to detach the stand from the monitor.
2. Remove the stand. Then install the wall mount bracket on the rear of the monitor.

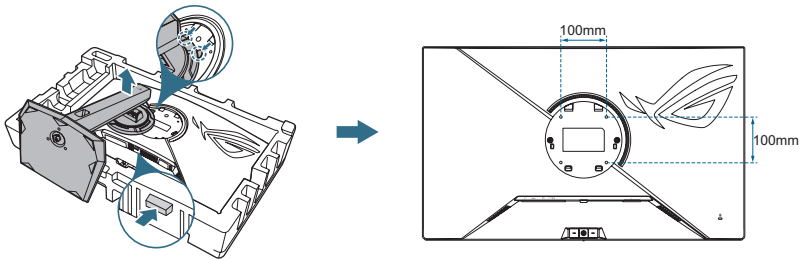

- The VESA wall mount kit (100 x 100 mm) is purchased separately.
- Use only the UL Listed Wall Mount Bracket with minimum weight/load 22.7kg.
- Mounting screw size is M4 x 8 mm (4pcs).

2.5 Connecting the Cables

Connect the cables as the following instructions:

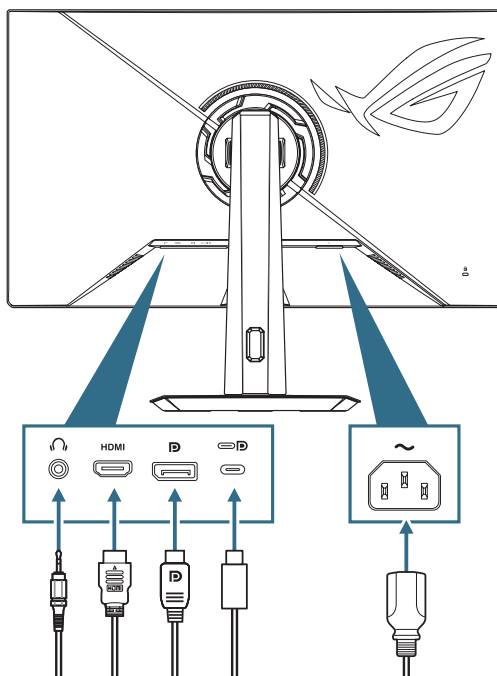

- **To connect the power cord:** Connect one end of the power cord to the monitor's AC IN input and the other end to a power outlet.
- **To connect the DisplayPort/HDMI/USB Type-C cable:**
 - a. Plug one end of the DisplayPort/HDMI/ USB type-C cable to the monitor's DisplayPort/ HDMI/USB type-C port.
 - b. Connect the other end of the DisplayPort/HDMI/USB type-C cable to your computer's DisplayPort/HDMI/USB type-C port.
- **To use the earphone:** Connect the end with 3.5mm audio jack to the monitor's earphone jack.

2.6 Turning On the Monitor


Press the  button on the monitor to turn on the monitor.

If the Power Indicator function is enabled and an input source is detected, the power LED will light up white to indicate that the monitor is turned on. The power LED will light up in Power Saving mode.

You can also press any button to turn on the monitor when the monitor is turned off.

2.7 Adjusting the Monitor


- For optimal viewing, we recommend that you look at the full face of the monitor, then adjust the monitor to the angle that is most comfortable for you.
- Hold the stand to prevent the monitor from falling when you change its angle.
- You can adjust the monitor's angle from -5° to 20° and it allows 25° swivel adjustment from either left or right. You can also adjust the monitor's height within ± 110 mm.

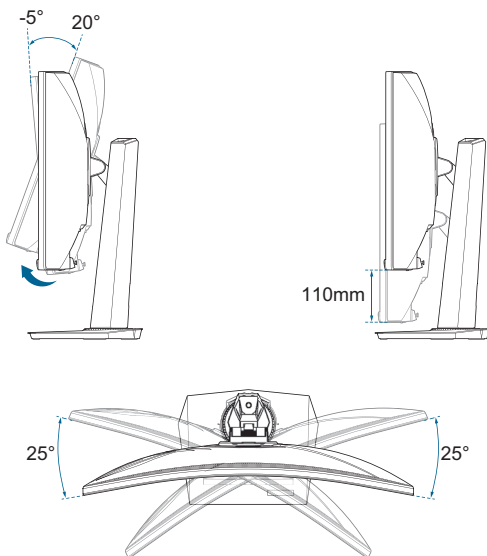

3.1 OSD (On-Screen Display) Menu

3.1.1 How to Reconfigure

Use the control buttons on the monitor to navigate through the menu and make adjustments.

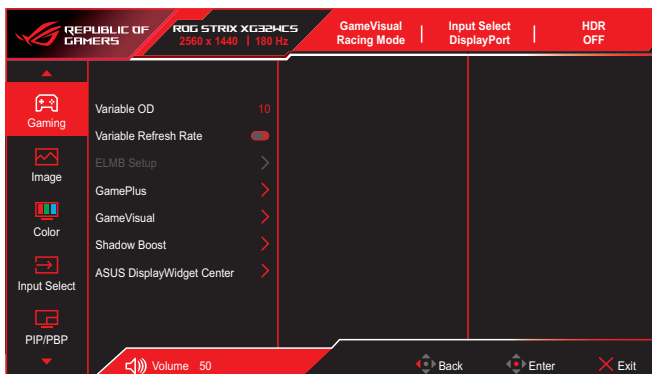


To navigate through the menu and make adjustments, do the following:

1. Press the  button to activate the OSD menu.
2. Move the  button up/down to navigate through the functions. Highlight the desired function and press the  button to activate it. If the function selected has a sub-menu, move the  button up/down again to navigate through the sub-menu functions. Highlight the desired sub-menu function and press the  button or move the  button right to activate it.
3. Move the  button up/down to change the settings of the selected function.
4. To exit and save the OSD menu, press the  button or move the  button left repeatedly until the OSD menu disappears. To adjust other functions, repeat steps 1 to 3.

3.1.2 OSD Function Introduction

1. Gaming

Configure your gaming preferences.

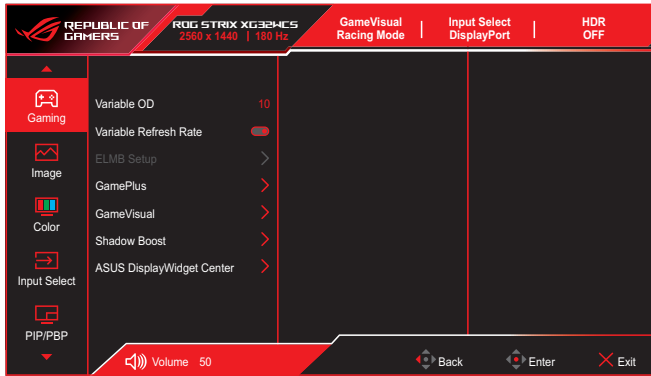

- **Variable OD:** Speed up the response time by Over Drive technology.
- **Variable Refresh Rate:** Allows an Variable Refresh Rate supported graphics source to dynamically adjust display refresh rate based on typical content frame rates for power efficient, virtually stutter free and low-latency display update.



- Variable Refresh Rate can only be activated within 48Hz-144Hz for HDMI and 48Hz-180Hz for DisplayPort and USB Type-C.
 - For supported GPUs, minimum PC system and driver requirements, please contact the GPU manufactures.
 - The following function will be disabled when Variable Refresh Rate turn on.
 - PIP/PBP
 - ELMB
 - Aspect Control
- **ELMB Setup:** Configure the ELMB related settings. This function eliminates screen tearing, reduces ghosting and motion blur when playing games.



-
- To activate ELMB, turn off Variable Refresh Rate function first.
 - The following function will be disabled when ELMB turn on.
 - Variable Refresh Rate
 - Blue Light Filter
 - ASCR
 - Aspect Control
 - ELMB Sync
 - PIP/PBP
 - Brightness
 - The following function will be disabled when ELMB Sync turn on.
 - Blue Light Filter
 - ASCR
 - Aspect Control
 - ELMB
 - PIP/PBP
-

- **GamePlus:** Configure the gaming environment.
See 1.3.3 GamePlus Function for details.
- **GameVisual:** Select the picture mode.
See 1.3.4 GameVisual Function for details.




HDR function will be disabled when GameVisual is turned on.

- **Shadow Boost:** Adjust the monitor gamma curve to enrich the dark tones in an image, making dark scenes and objects much easier to be seen.
- **ASUS DisplayWidget Center:** Display a QR code for you to access the information about ASUS DisplayWidget Center.

2. Image

Configure the image settings.

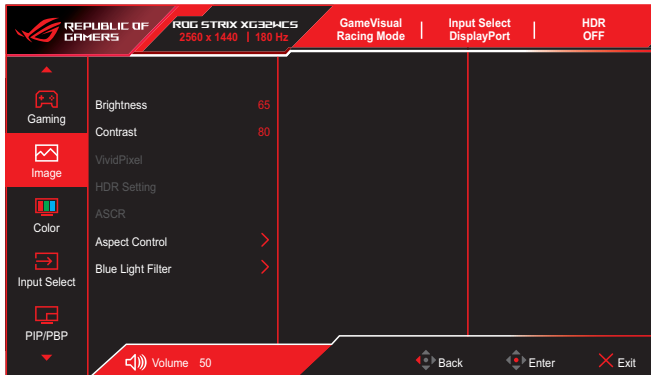

- **Brightness:** Adjust the brightness level.
- **Contrast:** Adjust the contrast level.
- **VividPixel:** Enhance the outline of the displayed picture and generates high-quality images on screen.
- **HDR Setting:** Set the HDR mode to Gaming HDR, Cinema HDR, Console HDR, or Brightness Adjustable. If the setting is set to **Brightness Adjustable**, HDR PQ curve will be affected.



- The following function will be disabled when HDR turn on.
 - ASCR
 - ELMB
 - ELMB Sync
 - ELMB Setup
 - PIP/PBP
 - GameVisual
 - Shadow Boost
 - Contrast
 - Blue Light Filter
 - Color Temp.
 - Gamma
 - Saturation
 - Power Saving Mode
 - Display Color Space
 - Six-axis Saturation
 - Sound Source

- **ASCR:** Turn on/off the ASCR (ASUS Smart Contrast Ratio) function.



-
- The following function will be disabled when ASCR turn on.
 - PIP/PBP
 - ELMB
 - ELMB Sync
-

- **Aspect Control:** Select the aspect ratio and adjust the screen position.



-
- The following function will be disabled when Aspect Control turn on.
 - Variable Refresh Rate
 - PIP/PBP
 - ELMB
 - ELMB Sync
-

- **Blue Light Filter:** Reduce the energy level of blue light emitted from the harmful blue light.

- **OFF:** No change.
- **Level 1~4:** The higher the level, the less blue light is scattered. When Blue Light Filter is activated, the default settings of Racing Mode will be automatically imported.
 - ✦ Between Level 1 to Level 3, the Brightness function is user-configurable.
 - ✦ Level 4 is optimized setting. The Brightness function is not user-configurable. It is compliance with TUV Rheinland Low Blue Light Software Solution Certification.



-
- The following function will be disabled when Blue Light Filter turn on.
 - ELMB
 - ELMB Sync
-




Please refer to the following to alleviate eye strains:

- Users should take some time away from the display if working for long hours. It is advised to take short breaks (at least 5 mins) after around 1 hour of continuous working at the computer. Taking short and frequent breaks is more effective than a single longer break.
- To minimize eye strain and dryness in your eyes, users should rest the eye periodically by focusing on objects that are far away.
- Eye exercises can help to reduce eye strain. Repeat these exercises often. If eye strain continues please consult a physician. Eye exercises: (1) Repeating look up and down (2) Slowly roll your eyes (3) Move your eyes diagonal.
- High energy blue light may lead to eye strain and AMD (Age-Related Macular Degeneration). Blue light filter to reduce 70% (max.) harmful blue light to avoid CVS (Computer Vision Syndrome).

3. Color


Configure the image color settings.

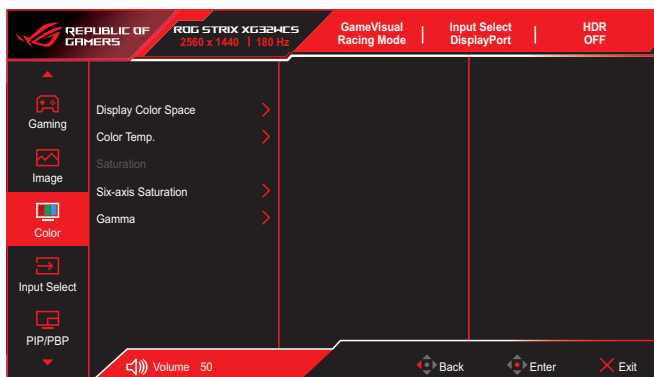

- **Display Color Space:** Select the color space for the monitor color output.
- **Color Temp.:** Contains 8 modes including 4000K, 5000K, 6500K, 7500K, 8200K, 9300K, 10000K and User mode.
- **Saturation:** Adjust the saturation level.
- **Six-axis Saturation:** Adjust the saturation for R, G, B, C, M, Y.
- **Gamma:** Allows you to set the color mode to 1.8, 2.0, 2.2, 2.4 and 2.6.

4. Input Select

Select your desired input source and toggle the Auto Input Detection function between on and off. The monitor input source will not automatically switch when the Auto Input Detection function is disabled.

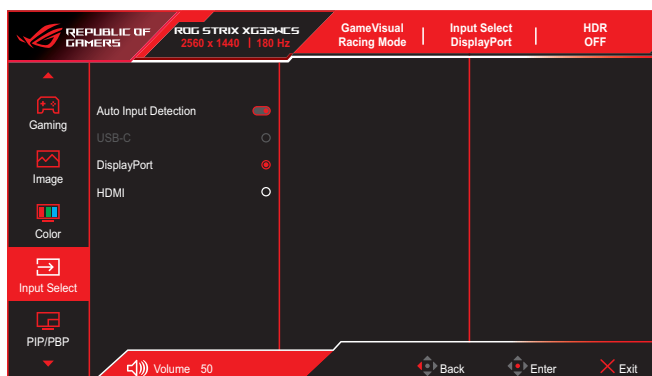


5. PIP/PBP

Configure the multi-picture related settings.



- This function cannot support HDR function.
- The following function will be disabled when PIP/PBP Mode turn on.
 - Variable Refresh Rate
 - ASCR
 - Aspect Control
 - ELMB
 - ELMB Sync

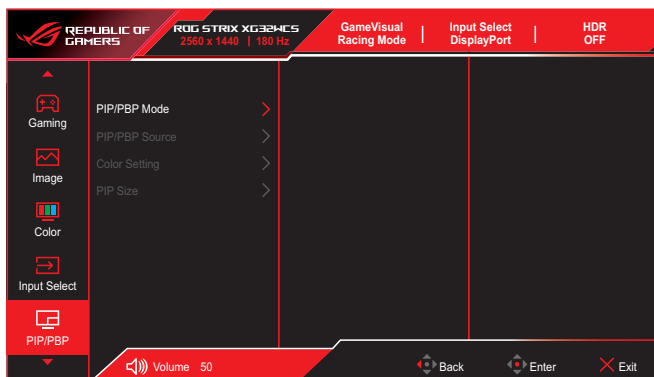


- **PIP/PBP Mode:** Selects PIP, PBP mode or turns it off.
- **PIP/PBP Source:** Selects the video input source for each PIP/ PBP window.
- **Color Setting:** Sets GameVisual mode for each PIP/PBP window.
- **PIP Size:** Adjusts the PIP size to Small, Middle, or Large.



This option is only available for PIP mode.

6. MyFavorite


Assign a function to the shortcut button, save the current system configurations, or restore the system configuration.

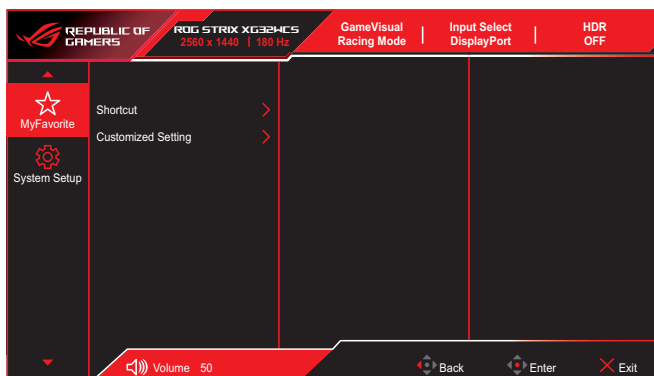

- **Shortcut:** Assign a function for the designated shortcut button.
- **Customized Setting:** Load/Save all settings on the monitor.


7. System Setup

Adjust the system configurations.

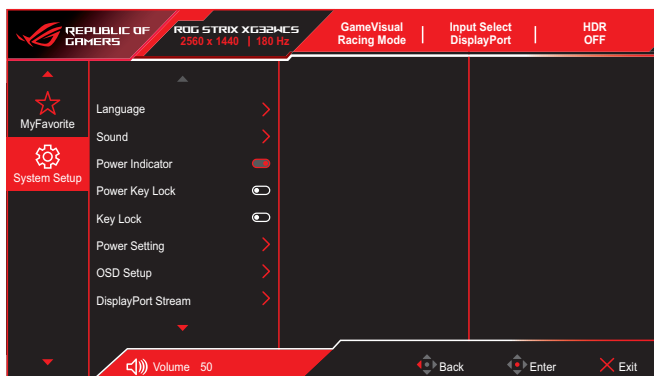

- **Language:** Select the OSD language.
- **Sound:** Configure the sound related settings.
 - **Volume (Earphone Out):** Adjust the volume level.
 - **Mute:** Enable/Disable the mute function.
 - **Sound Source:** Select the monitor sound comes from which source.
- **Power Indicator:** Turn the power LED indicator on/off.

- **Power Key Lock:** Disable/Enable the Power key.
- **Key Lock:** To disable all function keys. Press and hold the  button downward for more than five seconds to cancel the key lock function.
- **Power Setting:** Select the power setting mode.
If the setting is set to **Standard Mode**, it may result in higher power consumption. On the other hand, if the setting is set to **Power Saving Mode**, it may cause limited luminance performance.



- **OSD Setup:** Configure the OSD menu related settings.
 - **OSD Position:** Set the OSD menu position.
 - **OSD Timeout:** Adjust the OSD timeout.
 - **Transparency:** Adjust the OSD background from opaque to transparent.
 - **DDC/CI:** Enable/Disable the DDC/CI function.
- **DisplayPort Stream:** Compatibility with graphic card. Select DisplayPort 1.2, or DisplayPort 1.4 by graphic card supported DP version.
- **Information:** Display the monitor information.
- **All Reset:** Select **Yes** to revert all settings to the factory default mode.

3.2 Specifications


Panel type	FAST VA
Panel size	31.5"(1500R)
Max. resolution	2560 x 1440
Brightness	350nits (typical) / 400nits (peak)
Contrast ratio	3500:1 (typ.)
Viewing angle (H/V)	178°(H) / 178°(V)
Display colors	1.07B (8-bit+FRC)
Response time	1ms
Color temperature selection	8 modes (4000K/5000K/6500K/7500K/8200K/9300K/10000K/User mode)
Analog input	No
Digital input	DisplayPort v1.4 x1, HDMI v2.0 x1, USB Type-C x1
Earphone jack	Yes
SPDIF out	No
Speaker (Built-in)	No
USB3.2 Gen 1 port	No
USB2.0 port	No
Colors	Black
Power LED	White (On) / Orange (Standby)
Tilt	-5° to 20°
Swivel	-25° to 25°
Height adjustment	0 to 110 mm
VESA wall mount	100 x 100 mm
Kensington lock	Yes
Voltage rating	AC 100-240V, 50/60Hz
Power consumption	Power On: 130 W** Power saving: < 0.5 W Power Off: < 0.3 W
Temperature (Operating)	0°C to 40°C
Temperature (Non-operating)	-20°C to 60°C
Dimensions (W x H x D)	707.93 x 463.28 x 245.8 mm (with stand, lowest) 707.93 x 573.28 x 245.8 mm (with stand, highest) 707.94 x 425.26 x 108.67 mm (without stand)
Package dimensions (W x H x D)	920 x 562 x 235 mm
Weight	9.4 kg (with stand) 6.1 kg (without stand) 12.2 kg (Gross)

Multi-languages	23 languages (English, French, German, Italian, Spanish, Dutch, Portuguese, Russian, Czech, Croatian, Polish, Romanian, Hungarian, Turkish, Simplified Chinese, Traditional Chinese, Japanese, Korean, Persian, Thai, Indonesian, Ukrainian, Vietnamese)
Accessories	Power cord, Warranty card, QSG, DisplayPort Cable, ROG pouch, ROG sticker
Compliance and Standards	cTUVus, FCC, ICES-3, CB, CE, ErP, WEEE, EU Energy Label, UkrSEPRO, Ukraine Energy, CU, CCC, CEL, BSMI, RCM, MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, e-STANDBY, PSB, VN MEPS, RoHS, SIOC, CEC, HDMI, DP, Windows 10/11 WHQL, TÜV-Flicker Free, TÜV-Low Blue Light

*Specifications subject to change without notice.

** Measuring a screen brightness of 200 nits without audio/ USB/ card reader connections.

3.3 Outline Dimensions

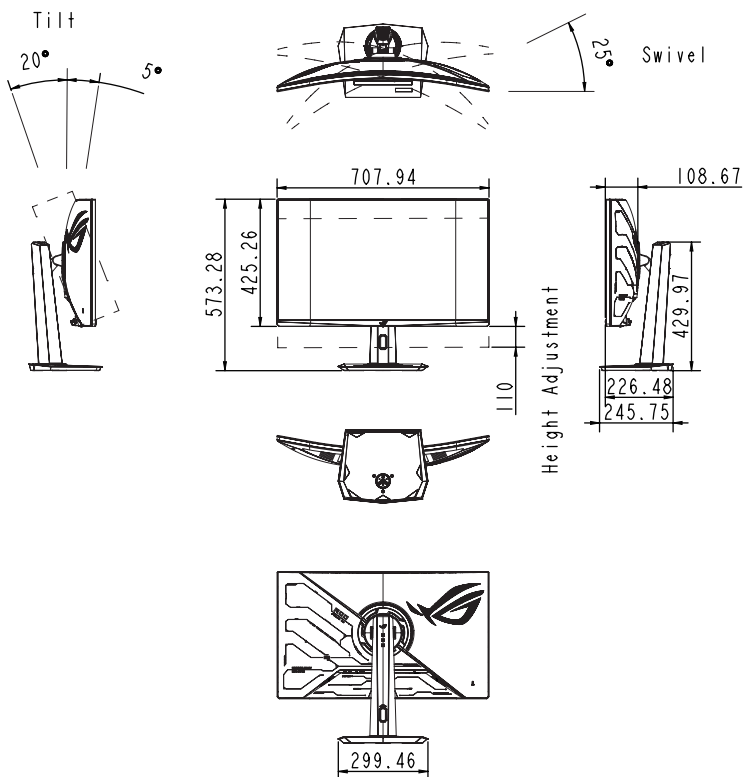

3.4 Troubleshooting (FAQ)

Problem	Possible Solution
Power LED is not ON	<ul style="list-style-type: none">• Press any button to check if the monitor is in the ON mode.• Check if the power cord is properly connected to the monitor and the power outlet.• Check the Power Indicator function in the OSD menu. Select "ON" to turn on the power LED.
The power LED lights white and there is no screen image	<ul style="list-style-type: none">• Check if the monitor and the computer are turned on.• Make sure the signal cable is properly connected to the monitor and the computer.• Inspect the signal cable and make sure none of the pins are bent.• Connect the computer with another available monitor to check if the computer is properly working.
Screen image is too light or dark	<ul style="list-style-type: none">• Adjust the Contrast and Brightness settings via OSD.
Screen image bounces or a wave pattern is present in the image	<ul style="list-style-type: none">• Make sure the signal cable is properly connected to the monitor and the computer.• Move electrical devices that may cause electrical interference.
Screen image has color defects (white does not look white)	<ul style="list-style-type: none">• Inspect the signal cable and make sure that none of the pins are bent.• Perform All Reset via OSD.• Select the appropriate color temperature (Color Temp.) via OSD.
HDR content is not played properly	<ul style="list-style-type: none">• Make sure the input source supports HDR playback (with proper system settings and latest software).• Make sure the content is HDR encoded.
Power LED is flashing continuously (twice per second), but there is no display (cables and PC source confirmed normal).	<ul style="list-style-type: none">• System Safe Mode: The monitor has detected an internal anomaly and entered a protection mode to prevent potential hardware damage.• Technical Service Required: This condition cannot be resolved through standard user adjustments. Please send or bring your monitor to the Service Center for a hardware inspection and log analysis.

3.5 Enabled & Unavailable OSD Feature Functions

Enabled Function	Unavailable Functions
Variable Refresh Rate	ELMB
ELMB	Variable Refresh Rate, Uniform Brightness, Aspect Control, Blue Light Filter, Auto Logo Brightness, HDR Setting, Sniper
HDR	ELMB, Sniper, GameVisual, Shadow Boost, Brightness, Uniform Brightness, Contrast, Blue Light Filter, Display Color Space, Color Temp., Saturation, Six-Saturation, Gamma,Power Saving Mode
Aspect Control	ELMB
Blue Light Filter	ELMB, Uniform Brightness
Aura Sync	Aura RGB
Aura RGB	Aura Sync
Pixel Cleaning	Monitor unavailable for approx. 6 minutes
OLED Anti-Flicker	ELMB
Uniform Brightness	ELMB, Blue Light Filter

3.6 Supported Timing List

HDMI	DisplayPort	USB Type-C
640x480 @60Hz	640x480 @60Hz	640x480 @60Hz
640x480 @75Hz	640x480 @75Hz	640x480 @75Hz
800x600 @60Hz	800x600 @60Hz	800x600 @60Hz
800x600 @75Hz	800x600 @75Hz	800x600 @75Hz
1024x768 @60Hz	1024x768 @60Hz	1024x768 @60Hz
1024x768 @75Hz	1024x768 @75Hz	1024x768 @75Hz
1280x720 @60Hz	1280x720 @60Hz	1280x720 @60Hz
1280x960 @60Hz	1280x960 @60Hz	1280x960 @60Hz
1280x1024 @60Hz	1280x1024 @60Hz	1280x1024 @60Hz
1600x1200 @60Hz	1600x1200 @60Hz	1600x1200 @60Hz
720x480 @60Hz	720x480 @60Hz	720x480 @60Hz
720x576 @50Hz	720x576 @50Hz	720x576 @50Hz
1280x720 @50Hz	1280x720 @50Hz	1280x720 @50Hz
1280x720 @60Hz	1280x720 @60Hz	1280x720 @60Hz
1920x1080 @24Hz	1920x1080 @24Hz	1920x1080 @24Hz
1920x1080 @25Hz	1920x1080 @25Hz	1920x1080 @25Hz
1920x1080 @30Hz	1920x1080 @30Hz	1920x1080 @30Hz
1920x1080 @50Hz	1920x1080 @50Hz	1920x1080 @50Hz
1920x1080 @60Hz	1920x1080 @60Hz	1920x1080 @60Hz
1920x1080 @100Hz	1920x1080 @100Hz	1920x1080 @100Hz
1920x1080 @120Hz	1920x1080 @120Hz	1920x1080 @120Hz
3840x2160 @24Hz	2560x1440 @60Hz	2560x1440 @60Hz
3840x2160 @25Hz	2560x1440 @100Hz	2560x1440 @100Hz
3840x2160 @30Hz	2560x1440 @120Hz	2560x1440 @120Hz
3840x2160 @50Hz	2560x1440 @144Hz	2560x1440 @144Hz
3840x2160 @60Hz	2560x1440 @165Hz	2560x1440 @165Hz
2560x1440 @60Hz	2560x1440 @180Hz	2560x1440 @180Hz
2560x1440 @100Hz		
2560x1440 @120Hz		
2560x1440 @144Hz		

* Modes not listed in the table may not be supported. For optimal resolution, we recommend that you choose a mode listed in the table above.

