


**ProArt Z790-CREATOR  
WIFI**

**ASUS**

Intel®  
Z790

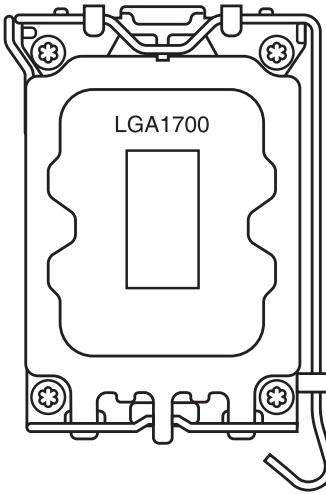

- DDR5 DIMM\_A1 (64bit, 288-pin module)
- DDR5 DIMM\_A2 (64bit, 288-pin module)
- DDR5 DIMM\_B1 (64bit, 288-pin module)
- DDR5 DIMM\_B2 (64bit, 288-pin module)

- PLUG\_8PIN\_PWR
- ATX\_12V\_1
- ATX\_12V\_2
- AIO\_PUMP
- CPU\_OPT
- CPU\_FAN
- CPU\_OV
- RGB\_HEADER
- DP\_IN\_12
- HDMI
- LAN1\_U32G2\_1 TBT4\_EC1
- LAN2\_U32G2\_2 TBT4\_EC2
- U32G2\_3456
- M.2(WIFI)
- FLBK\_LED
- AUDIO BIOS\_FLBK
- CHA\_FAN1
- CHA\_FAN2
- M.2\_1(SOCKET3)
- 2242
- 2260
- 2280
- 22110
- PCIEX16(G5)\_1
- M.2\_2(SOCKET3)
- 2280
- 2260
- 2242
- PCIEX16(G5)\_2
- M.2\_3(SOCKET3)
- M.2\_4(SOCKET3)
- 22110
- 2280
- 2260
- 2242
- PCIEX16(G4)
- TPM
- T\_SENSOR
- CHA\_FAN5
- PANEL
- AAFP
- COM
- CLRTC
- BMC\_HEADER
- ADD\_GEN2\_3
- USB\_E12
- USB\_E34
- SATA6G\_8
- SATA6G\_7
- CHA\_FAN3
- CHA\_FAN4
- ADD\_GEN2\_2
- ADD\_GEN2\_1
- U32G2X2\_C9
- U32G1\_78
- SATA6G\_1 SATA6G\_2
- SATA6G\_3 SATA6G\_4
- SATA6G\_5 SATA6G\_6
- CPU
- DRAM
- VGA
- BOOT
- ATX\_PWR
- PD\_12V\_PWR
- ATX\_12V\_1
- ATX\_12V\_2
- PD\_12V\_PWR
- U32G2X2\_C9