

RS501A-E12-RS12U

AMD Single-socket, 1U Rack Server



5th Generation AMD EPYC Processors with AMD 3D V-Cache technology

ASUS RS501A-E12-RS12U was designed for general purpose application. With the front 12 hot-swap bays and optional internal 4 bays, RS501A-E12-RS12U is the economic design for rack placement.

FEATURE

- 1 x AMD EPYC 9005 series processor
- With 24*DDR5 DIMM up to 5200Mhz
- 2 x M.2 socket support
- 3 x PCIe + 1 x OCP expansion in 1U rack sever.
- Internal 4-bay cage for mid bay SKU

AMD EPYC™ 9005 series processors support

RS501A-E12 series is built on the AMD platform to deliver incredible performance and offer more CPU cores powered by AMD EPYC 9005 series processors.

Industry-leading memory capability

With 2 DIMM per channel design, RS501A-E12 Series supports up to 24 x DIMM slots. The CPU's memory controller supports DDR5 memory with 12 channels up to 5200Mhz . We deliver the industry-leading technology of server memory for our customers' business.

Amazing compact design of internal 4-bay cage option for more storage possibility

ASUS RS501A-E12-RS12U features an internal 4-bay cage option*. We redefine the possibility of 1U rack from traditional image of Max. 12 storage bays to the whole new image of 16 drives support.

Comprehensive IT infrastructure management solution


ASUS RS501A-E12-RS12U server features an embedded ASMB11-iKVM (BMC, AST2600) and is bundled with ASUS Control Center to provide comprehensive out-of-band and in-band management capability.

Target market

- General-purpose Rack Server
- Enterprise Application

1. 12 x 2.5" Hot-swap Storage Bays
2. Internal 4-bay cage for mid bay SKU only*
3. 1 x PCIe Gen5 x16 slot for full-height, half-length card
4. 1 x PCIe Gen5 x16 slot for low-profile card
5. 1 x PCIe Gen5 x16 slot for low-profile card
6. 1 x OCP 3.0 Mezzanine socket
7. 1+1 80 PLUS Platinum/ Titanium CRPS
8. AMD EPYC™ 9005 Processor Family (Up to 360W)
9. 24*DDR5 DIMM up to 5200Mhz

* Internal Storage Bays cannot be purchased separately

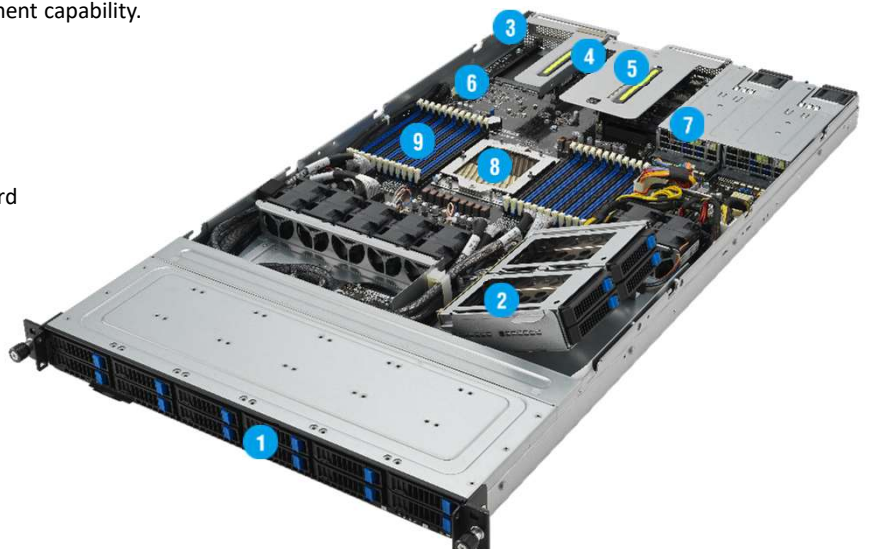

RS501A-E12-RS12U

SPECIFICATION

Processor		1 x Socket SP5 (LGA 6096) Supports AMD EPYC™ 9005 series processors or AMD EPYC™ 9004 series processors, up to 360W, with AMD 3D V-Cache technology
Memory	Total Slots	24 12-channel, 2 DIMM per channel
	Capacity	Up to 2,304GB
	Memory Type	AMD EPYC™ 9005 series processors DDR5 5600 RDIMM 2DPC (1 of 2) up to 5200 2DPC (2 of 2, 1R+1R) up to 4400, 2DPC (2 of 2, 2R+2R) up to 4000
	Memory Size	AMD EPYC™ 9004 series processors DDR5 4800 RDIMM 2DPC (1 of 2) up to 4800, 2DPC (2 of 2, 1R+1R) up to 4000 2DPC (2 of 2, 2R+2R) up to 3600
		96GB, 64GB, 32GB, 16GB (RDIMM) *Refer to ASUS server AVL for the latest update
Expansion Slots	Total Slots	3 PCIe Gen5 slots + 1 OCP3.0
	Slot Type	1 x PCIe x16 slot (Gen5 x16 link, FH, HL) 1 x PCIe x16 slot (Gen5 x16 link, LP, HL) 1 x PCIe x16 slot (Gen5 x8 link, LP, HL) 1 x OCP3.0 socket (Gen5 x16 link)
Storage Bays		Front:12 x 2.5" Hot-swap Storage Bays (12 x SATA/SAS/ U.2 or U.3 NVMe Devices) Mid storage bays SKU support up to 16NVMe/SATA 2 x M.2 socket (Gen4 x4 link or SATA mode, up to 22110 module)
Networking	LAN	1 x Dual Port Intel I350-AM2 Gigabit LAN controller 1 x Dedicated Management port (BMC AST2600)
Security		Optional TPM module Optional PFR module
Front I/O Ports		-
Rear I/O Ports		2 x USB 3.2 Gen1 ports 2 x Gigabit LAN ports (RJ45) 1 x Management port (RJ45) 1 x VGA port 1 x COM port
Switch/LED		Front: 1 x Power Button/LED 1 x Location Button/LED 1 x Message LED 2 x LAN LED Rear: 1 x Port80 LED (Q-Code) 1 x Power Switch w/ LED 1 x Location Switch w/ LED 1 x Message LED
OS Support		*Please find the latest OS support from https://www.asus.com/event/Server/OS_support_list/OS.html
Management Solution	Software	ASUS Control Center (in-band)
	Out of Band Remote Management	ASMB11-iKVM (BMC AST2600)
Dimension		842.5mm x 449mm x 43.85mm (1U) 33.15" x 17.68" x 1.73"
Net Weight Kg (CPU, DRAM & HDD not included)		14.16 kg
Gross Weight Kg (CPU, DRAM & HDD not included, Packing include)		19.16 kg
Power Supply (following different configuration by region)		1+1 Redundant 1200W /1600W 80 PLUS Platinum Power Supply 1+1 Redundant 1600W 80 PLUS Titanium Power Supply
Environment		Operation temperature: 10°C ~ 35°C Non operation temperature: -40°C ~ 70°C Non operation humidity: 20% ~ 90% (Non condensing)

RS501A-E12 Series

SPECIFICATION

Series	RS501A-E12 Series Support Matrix	
Model	RS501A-E12-RS12U	RS501A-E12-RS4
Processor	1 x Turin CPU or 1 x Genoa CPU	
GPU	Up to 2 single-slot GPU cards	
Memory	AMD EPYC™ 9005 series processors 24 x DIMM DDR5 5600/4800/4400/4000/3600 RDIMM/ 3DS RDIMM 2DPC (1 of 2) up to 5200 2DPC (2 of 2, 1R+1R) up to 4400, 2DPC (2 of 2, 2R+2R) up to 4000	AMD EPYC™ 9004 series processors 24 x DIMM DDR5 4800/4400/4000/3600 RDIMM/ 3DS RDIMM 2DPC (1 of 2) up to 4800, 2DPC (2 of 2, 1R+1R) up to 4000 2DPC (2 of 2, 2R+2R) up to 3600
M.2	2 x PCIe x4 or 2 x SATA	
Expansion	1 x PCIe x16 slot (Gen5 x16 link, FH, HL) 1 x PCIe x16 slot (Gen5 x16 link, LP, HL) 1 x PCIe x16 slot (Gen5 x8 link, LP, HL) 1 x OCP3.0 socket (Gen5 x16 link)	
Storage	Front bays: 12 x 2.5" Hot-Swap drive bays 12 x SATA/SAS/NVME* Optional 4 x 2.5" Internal drive bays 4 x SATA/NVME** *SAS support only from optional SAS HBA/RAID card **optional, cannot be purchased separately	Front bays: 4 x 3.5" Hot-Swap drive bays Support up to 4 x SATA/SAS* *SAS support only from optional SAS HBA/RAID card
NIC	2 x 1GbE RJ45 onboard LAN ports (Intel i350-AM2 controller) 2 x 10Gb OCP Card (Optional) 1 x Management LAN	

* The total number of NVMe drives installed will affect the total number of GPUs that can be installed.