

RS521A-E12-RS24U

AMD Single Socket, High Performance 2U Server



5th Generation AMD EPYC Processors

ASUS RS521A-E12-RS24U was designed to accelerate application performance leveraging accelerator cards and storage scalability. With the CPU and memory configured in a front parallel design that enables efficient airflow for excellent thermal performance, RS521A-E12-RS24U is optimized for rack placement. Featuring the single processor in a 2U chassis, RS521A-E12 series delivers the right-sized rack server dimensions for price sensitive applications and meets the demanding computing requirements.

Feature

- 1 x AMD EPYC 9005 Series Processor
- With 24*DDR5 DIMM up to 5200Mhz
- PCIe Gen5 slots
- Max 2x DW GPU cards supported
*24Nvme SKU can't support GPU
- Rack-optimized Design
- 24 x 2.5" Hot-swap HDD bays

Industry-leading memory capability

With 2 DIMM per channel design, RS501A-E12 Series supports up to 24 x DIMM slots. The CPU's memory controller supports DDR5 memory with 12 channels up to 5200Mhz . We deliver the industry-leading technology of server memory for our customers' business.

AMD EPYC™ 9005 Series Processors

The RS521A-E12 Series is built on the latest AMD EPYC™ 9005 Series Processor, and designed for the demand of scale-out computing, and wide range of existing and emerging workloads.

The best storage interface combination for software-defined storage management

Front: 24 x 2.5" hot-swap storage bays (supports maximum 24 x 2.5" U.2/U.3 NVMe devices)

Rear: 2 x 2.5" hot-swap storage bays (supports SATA devices)

Comprehensive IT infrastructure management solution

ASMB11-iKVM and ASUS Control Center (Classic)

Target market


- Data center Storage Server
- Enterprise Application

1. Asset Tag
2. 24*DDR5 DIMM up to 5200Mhz
3. AMD EPYC™ 9005 Processor Family (Up to 360W)
3. 2 x PCIe x16 slot(Gen5 x16 link, FHFL) or dual-slot GPU cards
or 4 x PCIe x16 slot(Gen5 x8 link, FHFL)*
5. 1 x PCIe x16 slot(Gen5x8 link, LP)
6. 1 x OCP 3.0 Mezzanine (Gen5 x16 link)
7. 1+1 Titanium /Platinum PSUs
8. 24 x 2.5" Hot-swap HDD Bays
9. 4 x Redundant fans (optional)**
10. 2 x Rear-bay support SATAIII

*The 24 NVMe configuration will not support any GPU.

*Slot 1-4 in rear panel will not be available with 24 NVMe configuration.

**Please select it when purchasing order and we will have assembling and standard testing before ship

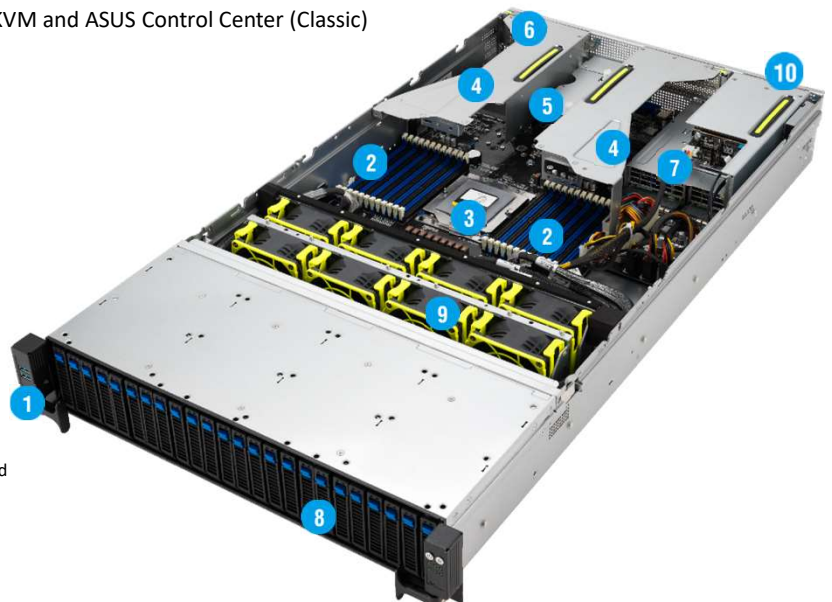

RS521A-E12-RS24U

SPECIFICATION

Processor Support.		1 x Socket SP5 (LGA 6096) Supports AMD EPYC™ 9005 series processors or AMD EPYC™ 9004 series processors, up to 360W*	
Core Logic		System on Chip (SOC)	
Memory	Total Slots	24 12-channel, 2 DIMM per channel	
	Capacity	Maximum up to 2,304GB	
	Memory Type	AMD EPYC™ 9005 series processors DDR5 6400/5600 RDIMM/3DS RDIMM 2DPC (1 of 2) up to 5200 with "6400 RDIMM", other 4800 2DPC (2 of 2, 1R+1R) up to 4400, with "6400 RDIMM", other 4000 2DPC (2 of 2, 2R+2R) up to 4000, with "6400 RDIMM", other 3600	AMD EPYC™ 9004 series processors DDR5 4800 RDIMM/ 3DS RDIMM 2DPC (1 of 2) up to 4800, 2DPC (2 of 2, 1R+1R) up to 4000 2DPC (2 of 2, 2R+2R) up to 3600
	Memory Size	96GB, 64GB, 32GB, 16GB (RDIMM) *Refer to ASUS server AVL for the latest update	
Expansion Slots	Total PCIe Slots	Up to 5 PCIe Gen5 slots + 1 OCP3.0	
	Slot Type	[16 x NVMe] up to 5 PCIe Gen5 slots + 1 OCP3.0 2 x PCIe Gen5 x16, FHFL or 4 x PCIe Gen5 x8, FHFL 1 x PCIe Gen4 x8, LP 1 x OCP3.0 (PCIe Gen5 x16)	[24 x NVMe] 1 x PCIe Gen5 x8, LP + 1 x OCP3.0 (can't support GPU)
Disk Controller	SATA Controller	CPU Integrated	
	SAS Controller	Optional kits: Broadcom Mega RAID 9560-16i ASUS PIKE II 3008 8-port SAS HBA card	
Storage Bays		24 x 2.5” hot-swap drive bays (24 x U.2/U.3 NVMe or 16 x U.2/U.3 NVMe + 8x SATA/SAS 2 x 2.5” hot-swap drive bays (Rear-bay support SATAIII) 2 x M.2 socket (Gen4 x4 link or SATA mode, up to 22110 module)	
Networking	LAN	1 x Dual Port Intel I350-AM2 Gigabit LAN Controller, 1 x Dedicated Management port	
Graphic	VGA	Aspeed AST2600 64MB	
Front I/O Ports		2 x USB 3.2 Gen1 ports	
Rear I/O Ports		2 x USB 3.2 Gen1 ports, 1 x VGA port, 2 x RJ-45 GbE LAN ports, 1 x RJ-45 Management LAN port	
Switch/LED		Front: 1 x Power Switch (w/ LED) 1 x Reset Switch 1 x Location Switch (w/ LED) 1 x HDD Access LED 1 x Message LED LAN 1-2 LED Rear: 1 x Port80 LED (Q-Code) 1 x Power Switch w/ LED 1 x Location Switch w/ LED 1 x Message LED	
OS Support		Please find the latest OS support from OS Compatibility Guide ASUS	
Management Solution	Software	ASUS Control Center (Classic)	
	Out of Band Remote Management	On-Board ASMB11-iKVM for KVM-over-IP	
Dimension		840mm x 449mm x 88.1mm (2U) 33.07" x 17.68" x 3.47"	
Net Weight Kg (CPU, DRAM & HDD not included)		19.14 kg	
Gross Weight Kg (CPU, DRAM & HDD not included, Packing include)		26.63 kg	
Power Supply (following different configuration by region)		1+1 Redundant 2000W/1600W Titanium Power Supply 1+1 Redundant 1200W Platinum Power Supply	
Environment		Operation temperature: 10°C ~ 35°C Non operation temperature: -40°C ~ 70°C Non operation humidity: 20% ~ 90% (Non condensing)	

*CPU with TDP supported under specific conditions. For higher wattage CPU demand, please contact us

RS521A-E12 Series

SPECIFICATION

Series	RS521A-E12 Series Support Matrix	
Model	RS521A-E12-RS24U	RS521A-E12-RS12U
Processor	1 x Turin CPU or 1 x Genoa CPU	
GPU	Up to 4 single-slot or 2 double-slot GPU cards (RS521A-E12-RS24U, 24 NVMe SKU can't support GPU)	
Memory	24 x DIMM slots with AMD EPYC™ 9005 series processors DDR5 6400/5600 RDIMM/3DS RDIMM Maximum 2,304GB 2DPC (1 of 2) up to 5200 with "6400 RDIMM", other 4800 2DPC (2 of 2, 1R+1R) up to 4400, with "6400 RDIMM", other 4000 2DPC (2 of 2, 2R+2R) up to 4000, with "6400 RDIMM", other 3600 with AMD EPYC™ 9004 series processors DDR5 4800 RDIMM/ 3DS RDIMM Maximum 2,304GB 2DPC (1 of 2) up to 4800, 2DPC (2 of 2, 1R+1R) up to 4000 2DPC (2 of 2, 2R+2R) up to 3600	
M.2	2 x PCIe x4 or 2 x SATA	
Fan	Optional Redundant Fan **optional, cannot be purchased separately	
Expansion	[24 x NVMe] 1 x PCIe Gen5 x8, LP + 1 x OCP3.0 (can't support GPU) [16 x NVMe] up to 5 PCIe Gen5 slots + 1 OCP3.0 2 x PCIe Gen5 x16, FHFL or 4 x PCIe Gen5 x8, FHFL 1 x PCIe Gen4 x8, LP 1 x OCP3.0 (PCIe Gen5 x16)	up to 5 PCIe Gen5 slots + 1 OCP3.0 2 x PCIe Gen5 x16, FHFL or 4 x PCIe Gen5 x8, FHFL 1 x PCIe Gen5 x8, LP 1 x OCP3.0 (PCIe Gen5 x16)
Storage	24 x 2.5" hot-swap drive bays (optional) -24 x U.2/U.3 NVMe -16 x U.2/U.3 NVMe + 8x SAS/SATA (must use RAID card) 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) Support tri-mode Card (Broadcom) *SAS support only from optional SAS HBA/RAID card	12 x 3.5" hot-swap drive bays -12 x U.2/U.3 NVMe/SATA/SAS* 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) Support tri-mode Card (Broadcom) *SAS support only from optional SAS HBA/RAID card
NIC	2 x 1GbE RJ45 onboard LAN ports (Intel i350-AM2 controller) 2 x 10Gb OCP Card (Optional) 1 x Management LAN	

* The total number of NVMe drives installed will affect the total number of GPUs that can be installed.