

RS520A-E12-RS12U

AMD Single Socket, High Performance 2U Server



2U
CPU Number 1
Memory Number 24*
*2DPC support depends on AMD schedule

ASUS RS520A-E12-RS12U was designed to accelerate application performance leveraging accelerator cards and storage scalability. With the CPU and memory configured in a front parallel design that enables efficient airflow for excellent thermal performance, RS520A-E12 series delivers the right-sized rack server dimensions for price sensitive applications and meets the demanding computing requirements.

FEATURE

- 1 x AMD EPYC 9004 Series Processor with DDR5 Memory up to 4800Mhz
- PCIe Gen5 Ready
- Max 2x DW GPU cards supported
- Rack-optimized Design
- 12 x 3.5" Hot-swap HDD bays

Industry-leading memory capability

With 24 x DIMM slots, RS520A-E12 Series supports total 6,144GB memory size. The CPU's memory controller supports 24 x DDR4 memory slots with 12 channels, up to 4800Mhz of RDIMMs or LRDIMMs/3DS. We deliver the industry-leading technology of server memory for our customers' business.

AMD EPYC™ 9004 Series Processors

The RS520A-E12 Series is built on the latest AMD EPYC™ 9004 Series Processor, and designed for the demand of scale-out computing, and wide range of existing and emerging workloads.

The best storage interface combination for software-defined storage management

Front: 12 x 3.5" hot-swap storage bays (supports maximum 12 x 3.5" U.2/U.3 NVMe devices)
Rear: 2 x 2.5" hot-swap storage bays (supports SATA devices)


Comprehensive IT infrastructure management solution

ASMB11-iKVM and ASUS Control Center (ACC Classic)

Target market

- Data center Storage Server
- Enterprise Application

1. Asset Tag
2. 24 x DIMM, DDR5-4800, RDIMM, LRDIMM, LRDIMM 3DS
3. AMD EPYC™ 9004 Processor Family (Up to 400W)
4. 2 x PCIe x16 slot(Gen5 x16 link, FHFL) or dual-slot GPU cards
5. 2 x PCIe x16 slot(Gen5 x8 link, LP)
6. 1 x OCP 3.0 Mezzanine (Gen5 x16 link)
7. 1+1 80 PLUS Titanium /Platinum PSUs
8. 12 x 3.5" Hot-swap HDD Bays
9. 4 x Redundant fans (optional)**
10. 2 x Rear-bay support SATAIII

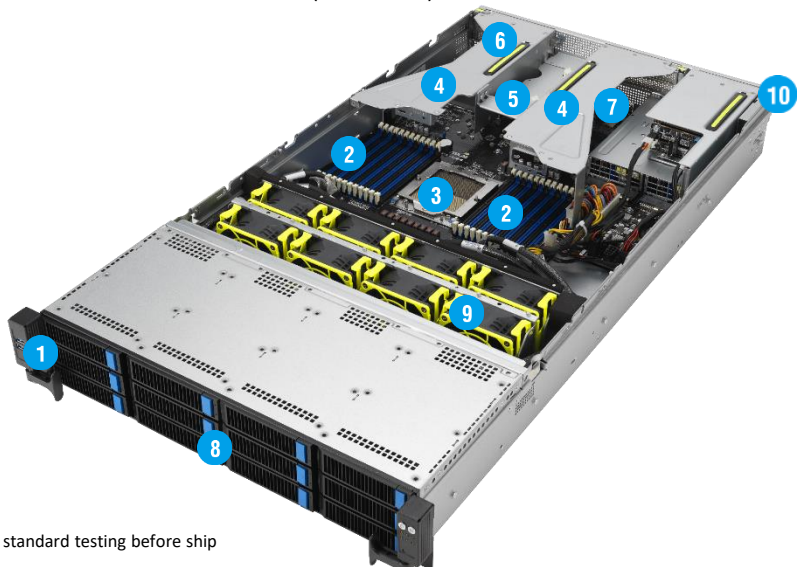

*Please select it when purchasing order and we will have assembling and standard testing before ship

RS520A-E12-RS12U

SPECIFICATION

Processor Support.		1 x Socket SP5 (LGA 6096) Supports AMD EPYC™ 9004 series processors (up to 400W)
Core Logic		System on Chip (SOC)
Memory	Total Slots	24 12-channel, 2 DIMM per channel *2DPC support depends on AMD schedule
	Capacity	Maximum up to 6,144GB
	Memory Type	DDR4 4800 RDIMM/LR-DIMM/LR-DIMM 3DS
	Memory Size	128GB, 64GB, 32GB, 16GB (RDIMM), 128GB, 64GB (LRDIMM), 256GB, 128GB, 64GB (LRDIMM 3DS) *Refer to ASUS server AVL for the latest update
Expansion Slots	Total PCIe Slots	Up to 6
	Slot Type	2 x PCIe x16 slot(Gen5x16 link, FHFL) or dual-slot GPU cards or 4 x PCIe x16 slot(Gen5 x8 link, FHFL) 2 x PCIe x16 slot(Gen5 x8 link, LP) 1 x OCP 3.0 Mezzanine (Gen5 x16 link)
Disk Controller	SATA Controller	CPU Integrated
	SAS Controller	Optional kits: Broadcom Mega RAID 9560-16i ASUS PIKE II 3008 8-port SAS HBA card
Storage Bays		12 x 3.5" hot-swap drive bays 12 x U.2/U.3 NVMe/SATA/SAS *SAS support only from optional SAS HBA/RAID card 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) 2 x M.2 socket (Gen4 x4 link or SATA mode, up to 22110 module)
Networking	LAN	1 x Dual Port Intel I350-AM2 Gigabit LAN Controller, 1 x Dedicated Management port
Graphic	VGA	Aspeed AST2600 64MB
Front I/O Ports		2 x USB 3.2 Gen1 ports
Rear I/O Ports		2 x USB 3.2 Gen1 ports, 1 x VGA port, 2 x RJ-45 GbE LAN ports, 1 x RJ-45 Management LAN port
Switch/LED		Front: 1 x Power Switch (w/ LED) 1 x Reset Switch 1 x Location Switch (w/ LED) 1 x HDD Access LED 1 x Message LED LAN 1-2 LED Rear: 1 x Port80 LED (Q-Code) 1 x Power Switch w/ LED 1 x Location Switch w/ LED 1 x Message LED
OS Support		Please find the latest OS support from OS Compatibility Guide ASUS
Management Solution	Software	ASUS Control Center (Classic)
	Out of Band Remote Management	On-Board ASMB11-iKVM for KVM-over-IP
Dimension		840mm x 449mm x 88.1mm (2U) 33.07" x 17.68" x 3.47"
Net Weight Kg (CPU, DRAM & HDD not included)		17.95 kg
Gross Weight Kg (CPU, DRAM & HDD not included, Packing include)		25.14 kg
Power Supply (following different configuration by region)		1+1 Redundant 1600W 80 PLUS Titanium Power Supply 1+1 Redundant 1200W/1600W 80 PLUS Platinum Power Supply
Environment		Operation temperature: 10°C ~ 35°C Non operation temperature: -40°C ~ 70°C Non operation humidity: 20% ~ 90% (Non condensing)

RS520A-E12 Series

SPECIFICATION

Series	RS520A-E12 Series Support Matrix	
Model	RS520A-E12-RS24U	RS520A-E12-RS12U
Processor	1 x Genoa CPU	
GPU	Up to 4 single-slot or 2 double-slot GPU cards (RS520A-E12-RS24U, 24 NVMe SKU can't support GPU)	
Memory	24 x DIMM *2DPC support depends on AMD schedule	
M.2	2 x PCIe x4 or 2 x SATA	
Fan	Optional Redundant Fan **Please select it when purchasing order and we will have assembling and standard testing before ship	
Expansion	[24 x NVMe] 1 x PCIe Gen5 x8, LP + 1 x OCP3.0 (can't support GPU) [16 x NVMe or 12x NVMe] up to 5 PCIe Gen5 slots + 1 OCP3.0 2 x PCIe Gen5 x16, FHFL or 4 x PCIe Gen5 x8, FHFL 1 x PCIe Gen4 x8, LP 1 x OCP3.0 (PCIe Gen5 x16)	up to 6 PCIe Gen5 slots + 1 OCP3.0 2 x PCIe Gen5 x16, FHFL or 4 x PCIe Gen5 x8, FHFL 2 x PCIe Gen5 x8, LP 1 x OCP3.0 (PCIe Gen5 x16)
Storage	24 x 2.5" hot-swap drive bays (optional) -24 x U.2/U.3 NVMe -16 x U.2/U.3 NVMe + 8x SAS/SATA (must use RAID card) -12x U.2/U.3 NVMe + 12x SAS/SATA - 8 x U.2/U.3 NVMe + 16x SAS/SATA 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) Support tri-mode Card (Broadcom) *SAS support only from optional SAS HBA/RAID card	12 x 3.5" hot-swap drive bays -12 x U.2/U.3 NVMe + 12x SATA/SAS* 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) Support tri-mode Card (Broadcom) *SAS support only from optional SAS HBA/RAID card
NIC	2 x 1GbE RJ45 onboard LAN ports (Intel i350-AM2 controller) 2 x 10Gb OCP Card (Optional) 1 x Management LAN	

* The total number of NVMe drives installed will affect the total number of GPUs that can be installed.